

DX-500 WIRELESS PAGER RECEIVER

Additional accessory for the DX-500 Perimeter Security Kit

Product Code: EL00191

Introduction


The DX-500 Wireless Pager Receiver is an additional accessory to the DX-500 series of long range perimeter protection products. The Pager Receiver can be connected to existing sensors within your DX-500 series and has the same 150m operating range. The Pager Receiver is compact and lightweight and comes with a built-in belt clip, making it ideal for carrying with you at all times around your property, ensuring you never miss an alert. Weatherproof and possessing an operating temperature of -15°C to 55°C, the unit is suitable for outdoor use.

Contents

- 1 x DX-500 Wireless Pager Receiver
- 2 x AAA batteries
- 1 x Small screwdriver

Battery Installation/Replacement

Open the rear cover on the Wireless Pager Receiver and insert the 2 x AAA batteries provided, noting the correct polarity. Replace the cover securely. **Please note: when the battery is low the red LED on the front of the unit will constantly show. When changing the batteries, the units do not need to be re-paired.**

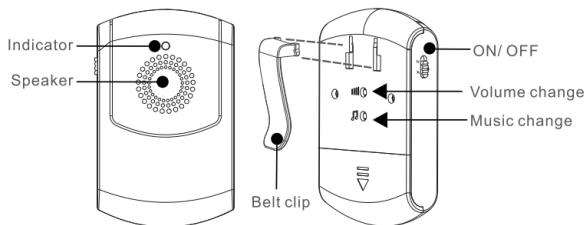

Volume Control

The Pager Receiver has a volume button (on the back of the unit) that allows you to select from four different volume levels. **Please note: the belt clip needs to be removed to access the buttons.** Simply press the volume button (with the small screwdriver) to hear the various sound level options. This level can be changed as and when you wish by pushing the volume button.

Operation & Pairing

The DX-500 Wireless Pager Receiver is compatible with the DX-500 Wireless Perimeter Security Kit or DX-500 Wireless Outdoor PIR Sensor. Please follow the steps below:

Before pairing, choose your preferred alert tone by using the music change button to cycle through the options (using the small screwdriver). The Pager Receiver has 50 different melodies to choose from. This allows you to set different melodies for different PIR Sensors, making it easy to identify which zone has been triggered.

Once you have chosen your desired tone you are ready to pair your Pager Receiver. Press and hold the volume button for five seconds, until you hear a chime and the red LED indicator starts flashing. The Pager Receiver is now in pairing mode and you simply need activate the PIR Sensor whilst the receiver is within range (150m). To activate, simply wave your hand in front of the PIR Sensor. The desired tone should trigger and the unit will vibrate, indicating pairing was successful. Pairing mode lasts five seconds and will automatically end after this time, or when a pairing is successful.

To reset the Pager Receiver and remove all pairings, press and hold the music change button for five seconds until you hear a noise. The Receiver has now been reset and all existing pairings have been deleted.

Defender Security Products

Unit 40
Manor Industrial Estate
Flint, Flintshire
CH6 5UY