

LUNA PERSONAL ATTACK ALARM

Stylish Personal Alarm with Strobe

Product Code: AL00040

Introduction

The Defender Luna is a modern and stylish companion to give you peace of mind. Carry it with you when on the move and activate it if you feel threatened. The piercing 125dBs siren plus strobe will deter threats and attract attention. Walk with confidence.


Operation

Before using the Defender Luna for the first time please remove the tab covering the batteries (see section overleaf).


The Luna utilises a user-friendly ring-pull operation. Place your finger in the gap and firmly pull to remove the entire ring
NOTE: the siren will sound immediately. This is loud!
To de-activate replace the pin into the alarm fully.

TURN OVER FOR BATTERY REPLACEMENT AND FIRST TIME USE

FRONT

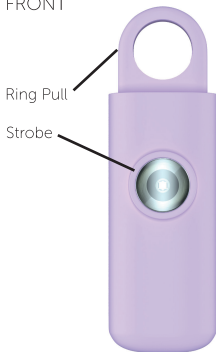

BACK

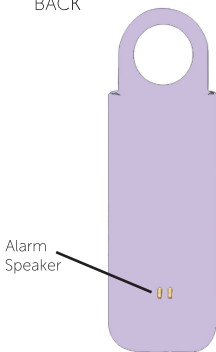

Batteries

Unlike older alarms, the Defender Luna comes with an easy-access battery compartment for rapid replacement wherever you are. No screws or tools needed.

Please read this section carefully and watch the video, to ensure you avoid accidental activation of the alarm during either process.

SCAN TO WATCH OUR HELPFUL VIDEO:



- First time tab removal

The Luna is powered by 2 x CR2032 cell batteries. For your convenience, all units are shipped with a battery tab in place to save power. You must remove this before using.

With the front-side facing up, place your right finger in the ring-pull and your left hand around the alarm body; gently twist the ring-pull away from you until the alarm body opens, then immediately separate the two sides.

Try to keep the pin inserted during this process. If it does come loose you will see the strobe but, as long as the sides are separated, the full siren will not sound.

Remove the tab, ensure the pin is full inserted into the front side, then simply clip both sides back together. Your alarm should now be active and you can test it.

- Changing old batteries

Your Defender Luna comes with a low battery indicator built in. When you hear a constant beeping, it means batteries are low and need changing.

To change, open using the same method as above and replace with like for like batteries, ensuring correct polarity.

After checking the pin is securely inserted into the front side, clip the alarm body back together to finish.