

MAX II SOLAR SECURITY LIGHT

High Powered PIR Security Light

Product Code: OT01052

Introduction

The Defender Max II Solar Security Light is a robust floodlight made from casting aluminium. The light is extremely bright, with 80 super bright white LEDs which provide 850 lumens of light. The unit is easy to install and comes with 4.8m of cable to attach the solar panel to the light unit.

The unit has a manual On-Auto-Off switch which allows the user to keep the light on constantly, off or on automatic, which uses the PIR to automatically switch on the light when somebody walks past.

Contents

- 1 x Solar Light
- 1 x Solar Panel (with cable)
- 6 x Wall Plugs
- 6 x Screws

Caution

- Do not install the light close to people or cars. Keep out of reach of children.
- Do not install the unit close to flammable items.
- Do not stare directly into the light.

Charging the Battery

To charge the unit, connect the solar panel to the light unit using the attached cable ensuring the solar panel jack is fully inserted into the socket in the light unit. Ensure the solar panel is facing the sun and wipe the panel regularly as dirt can affect the battery efficiency.

Installation

The Defender Max II Solar Security Light comes with a 4.8m cable to connect the light unit and the solar panel, allowing the two units to be 4.8m apart. Decide on the location of the light, ensuring the solar panel is in a location that receives full, direct sun for a minimum of 8 hours a day. Mount the light unit 2-3 meters above the ground on a solid surface capable of supporting the light even in windy conditions. The unit must be installed high enough to provide effective motion detection and light distribution.

Use the mounting bracket provided as a template, mark the holes that need to be drilled, ensuring there is no cables or electrical lines behind the wall. Drill the holes and install the wall plugs. Place the mounting bracket back over the holes and thread the enclosed screws to secure the bracket in position. Do the same for the solar panel unit. When both units are mounted on the wall, carefully position the power cord to the light. Adjust the motion detector head below the light by moving it left or right so that it faces the desired area. Move it up or down by using the screw located on the neck of the motion detector head.

Operation


Before first use it is recommended that the unit is in full sunlight for 3 days to allow the battery to fully charge. Turn the switch on the light unit to the "OFF" position to prevent accidental triggers. When the unit is fully charged move the switch to "AUTO" or "ON".

The light has 3 functions "OFF", "AUTO" and "ON".

OFF This is the middle position of the switch- the unit is off and the light will not turn on.

AUTO Move the switch to the left. The light will turn on automatically at night when motion is detected by the unit.

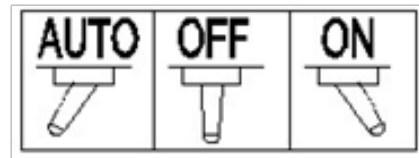


ON Move the switch to the right. The light is constantly on.




Adjusting the settings

The Defender Max II Solar Security Light has 3 adjustable settings: duration (TIME), sensitivity to light (LUX), sensitivity to motion detect (SENS).

LUX (Light level)

- The LUX control is used to control when the light should come on.
- If the knob is set to the maximum level,  the light will go on in most situations ranging from dark to daylight.
- If the knob is set to the minimum setting  the sensor will only trigger the light to turn on at dusk or when it is dark out. This is the ideal position for general evening and night operation. If the light is not operating at night due to interference from a street light or other interference, turn the LUX knob towards 



TIME (Duration)

- The TIME control is used to set the duration of time that the light should stay lit after motion is no longer detected in the field of vision.
- The TIME is adjustable from 8 seconds to 2 minutes. Moving the knob clockwise will increase the duration, moving it anti-clockwise will decrease the duration.

SENS (Sensitivity)

- The SENS control adjusts the range of motion detection.
- The minimum position provides a range of 2m.
- The middle position provides a range of 10m.
- The maximum position provides a range of 18m.



NOTE: The motion detector is the most sensitive to movement across the detection zone rather than the movement towards or away from the light.

Battery replacement

The battery is located in the light unit. Turn the switch to 'OFF'. Remove the screws from the back of the unit and remove the old battery. Replace with an identical 3.7V 18650 lithium-ion battery. Replace the cover and secure it with the screws.

Maintenance

When storing the unit indoor for more than 2-3 days, ensure the light is fully charged and turn the switch to 'OFF'. Store the light in a dry location free from dust and debris. Ensure the solar panel is free from dirt, dust and grime as this will affect the ability to efficiently charge the battery.

Defender Security Products

Unit 40
Manor Industrial Estate
Flint, Flintshire
CH6 5UY